

Clamp In Windows

Clamp In windows suit various applications supporting light, medium and heavy weight sections. The windows are robust, durable and aesthetically pleasing.

Clamp In windows are easy to fit because no drill holes in the hull superstructure are required. These windows can be fitted faster than through fix windows.

A variety of toughened glazing is available for the Clamp In, ranging from 6mm Single pane to Double Glazed or Laminated units.

There are a range of finishes available, from powder coating in a colour of your choice to a silver satin anodised finish or a combination of both.




Clamp In windows have hidden fixings. They have an elegant appearance and are less likely to leak, due to there being no fastening holes.

Clamp In Window Types:





- Fixed
- Sliding
- Half Drop
- Top Hung
- Hopper
- Multi Pane Fixed
- Multi Pane Slider
- Roof Light





Key Points:

- Hidden Fixings
- Variety of Glazing Options
- Variety of Finishes Available
- Mitred or Radius Corners

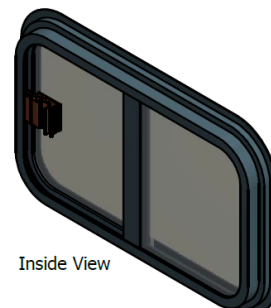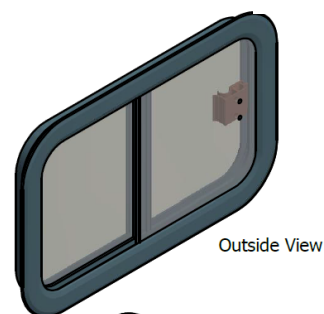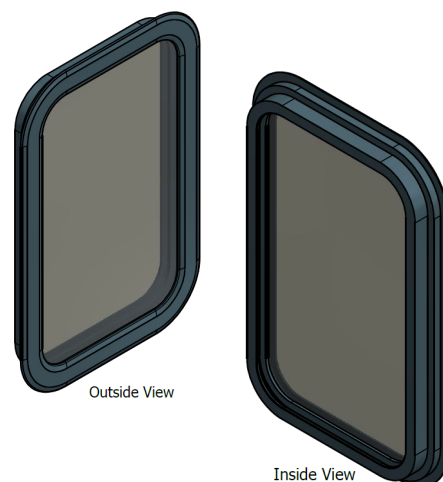

Clamp In Window Frame Technical Data

Series 10 Frames				
Frame Section	10_01	10_02	10_07	10_08
Details O/A Height 40.5mm Flange Length 15mm				
O/A Width	19.3mm	34mm	34mm	24mm
Radius	70mm+	65mm+	70mm	65mm+
Glass Thickness	4mm-6mm	4mm-6mm	15mm-20mm	8mm-12mm
Hull Thickness	Up to 17mm	Up to 25mm	Up to 25mm	Up to 20mm

Series 11 Frames				
Frame Section	11_01	11_02	11_03	11_07
Details O/A Height 45mm Flange Length 16mm				
O/A Width	26.3mm	42.5mm	31mm	42.5mm
Radius	75mm+	75mm+	80mm+	75mm+
Glass Thickness	5mm-10mm	5mm-10mm	11-15mm	22mm-25mm
Hull Thickness	Up to 17mm	Up to 35mm	Up to 30mm	Up to 35mm

Drawings and 3D models available on request.