


Sliding Window Spares Kit—CM KIT 002

S020 -v3

Seaglaze would always recommend the use of an experienced fitting team.



Where Things go:

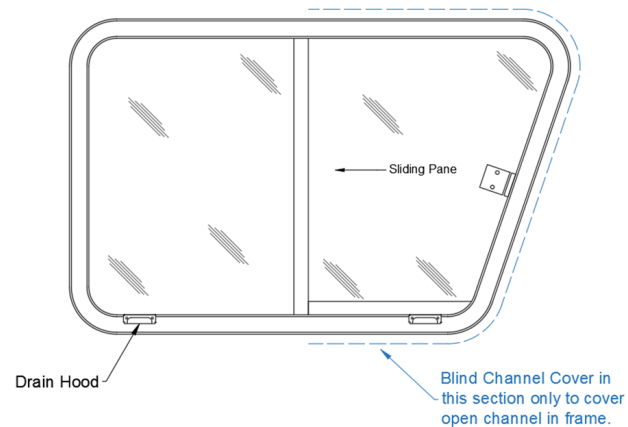


What's Included:

- 1x Flick over catch—FT CAT 160
- 1x Tri-Catch—CM CAT 001 A—Anodised Silver Satin
- 3m Brush Pile 4.8 x 6.0—SE SLD 044
- 3m Brush Pile 4.8 x 4.5—SE SLD 041
- 3m Flat Jag—SE SLD 120
- 3m Flock Sprayed Jag—SE SLD 102
- 2x Anodised Drain Hood—FT DRN 001 A
- 4m Blind Channel Cover—SE COV 001
- 1x Tef-Gel-Anti-corrosion paste-CO LUB 027
- 4m Block Rubber—SE CHF 004
- 1x 'D' Handle—FT HND 070 A—Anodised Silver Satin
- 4m Slider Bearer Rigid Track—SE SLD 200

Not all components will be used in every sliding window.

Equipment Required:

- Screw Driver
- Cleaning Materials

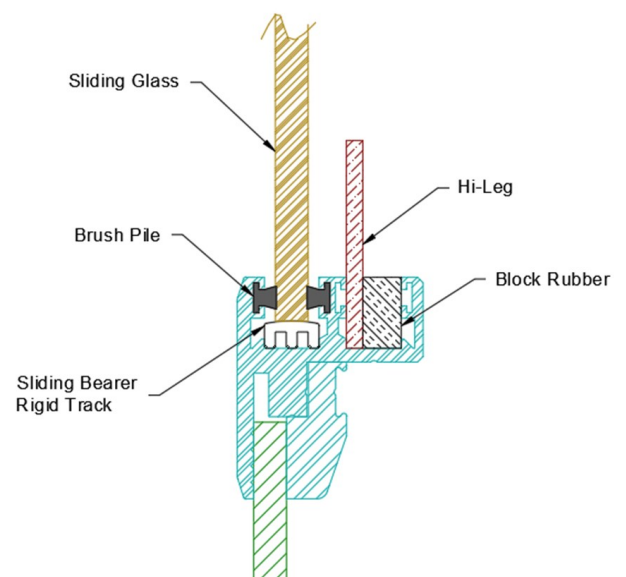

Sliding Window Spares Kit—CM KIT 002

S020 -v3

What things are used for:

- Flick over catch— To replace, remove screws and take off old flick over catch. Replace with new flick over catch and use screws to hold in place.
- Tri-Catch—To replace drill out rivets. (A blade may be needed to remove the tri-catch)
- Anodised Drain Hood—To replace, remove screws and take off old drain hood. Replace with new drain hood and use screws to hold in place.
- Blind Channel Cover—The old can be popped out using a suitable tool (eg. screwdriver) and the new one can then be pushed in.
- Tef-Gel—Use this to coat all screws before fixing, this helps prevent corrosion.
- Block Rubber—The old one can be removed and new one push in, if it is difficult to get the new block rubber in soapy water can be used as a lubricant.
- 'D' Handle—To replace drill out rivets. (A blade may be needed to remove the handle)

The window will need to be removed to use/replace the following parts:

- Brush Pile 4.8 x 6.0—Used to replace worn or damaged brush pile.
- Brush Pile 4.8 x 4.5—Used to replace worn or damaged brush pile.
- Flat Jag—Used to replace worn or damaged flat jag in sliding glass channel, this helps the glass run more smoothly. For instruction how to replace please see instruction M411.
- Flock Sprayed Jag—Used to replace worn or damaged flock sprayed jag in sliding glass channel, this helps the glass run more smoothly.
- Slider Bearer Rigid Track—Used to replace worn or damaged slider bearer rigid track in sliding glass channel, this helps the glass run more smoothly.

Other useful instructions include...

- Z010—Recommended products for maintenance

Find our other instructions at www.seaglaze.co.uk

Professional

Friendly

Expert